




# AVLANCHE

HIGH EFFICIENT  
**COOL AIRFLOW**  
FOR YOUR DYNAMIC FACTORY SPACE

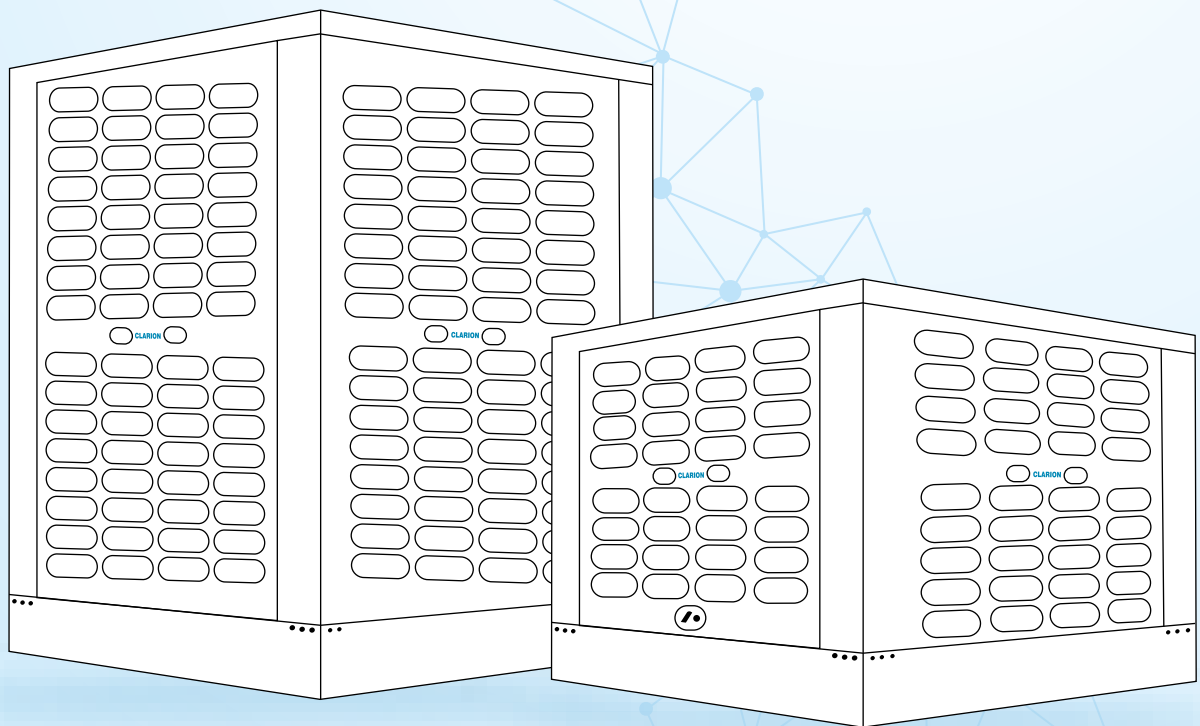

# AVLANCHE

18 / 30

Maintain the factory's comfort with the most powerful industrial air cooler Avlanche 18/30 packs the biggest cooling punch by combining impressive airflow with the large three-sided cooling media. The 304 Grade Stainless Steel Casing and perfectly calculated media surface give it a long life cooling and durability. Avlanche industrial cooler can be installed in a window, duct, or on portable wheels.

## KEY FEATURES



- ▶ Quickly cool indoor & outdoor spaces.
- ▶ Ideal for large warehouses, service bays, and stadiums
- ▶ RoHs Approved Bacteria Free Honeycomb Pads
- ▶ High Efficiency Axial fan
- ▶ Large Water reservoir
- ▶ Auto Water Drain & Inlet
- ▶ 304 Grade Stainless Steel Casing

### COVERAGE AREA

UP TO  
3000 Sq. Ft.\*

### AIRFLOW

UP TO  
18,000/30,000\*CMH

### CANTROL

SINGLE SPEED  
THREE PHASE



### PRO ARMOUR

WEATHER RESISTANT  
STAINLESS STEEL BODY




## PRO — ARMOUR

Made up of 304 Grade Stainless Steel it provides non corrosion interaction providing long life and worry free operation.

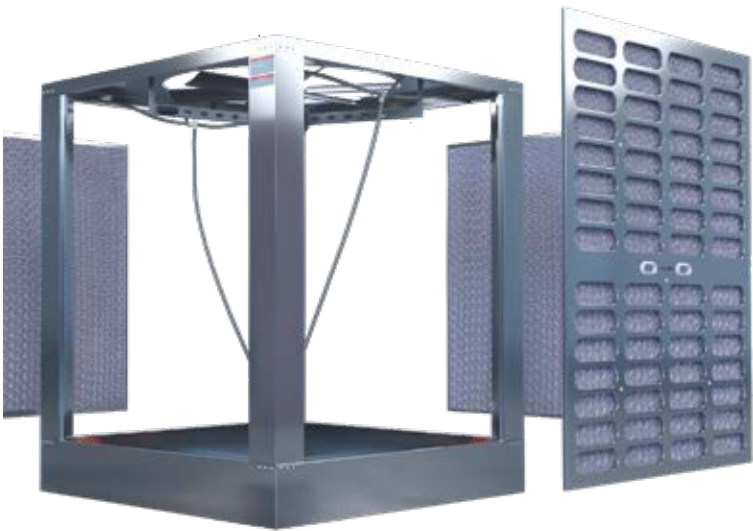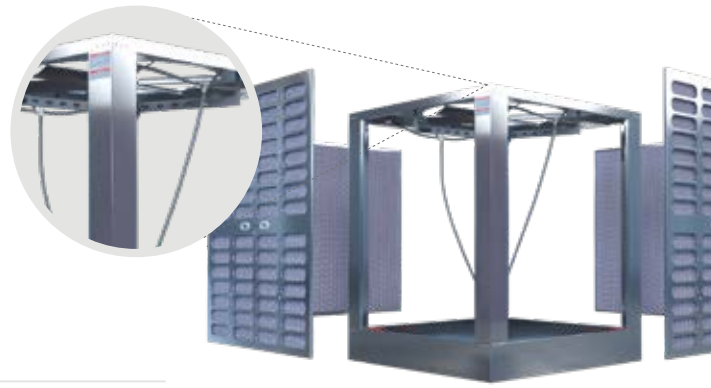

## INNOVATIVE DESIGN

Avalanche is the first in its segment designed smartly in stainless steel for maximum cooling efficiency and trouble free maintenance

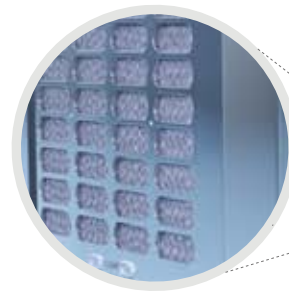

## BACTERIA FREE PADS

The ultra efficient 100 mm media is the best choice where maximum cooling is required. This media provides 80 % efficiency .



## POWERFUL, EFFICIENT MOTORS

Avalanche is driven with energy efficient, powerful motors designed for indian environment which can keep your ambience cool through out the entire day

# AVLANCHE



## Technical Specifications


Model	Ordering Information	Water Capacity	Inlet Water Supply Pressure	Input power and required breaker	Environment <sup>1</sup>	Airflow and Coverage
AVLANCHE 18	CL-DCT-AV18	150* L	120 PSI maximum	220/230 VAC 50 Hz	Well-ventilated Indoor or outdoor space	18000 cmh / 1500 sq. ft
AVLANCHE 30	CL-DCT-AV30	130* L	120 PSI maximum	415 VAC 50 Hz		

## Construction

Housing	Motor	Controls	Power Supply	Water Supply	Cooling Media	Maintenance
304 grade Stainless steel	Single speed, high-efficiency, totally enclosed	Manual Onboard Control	3 mtr power cord plugs into standard electrical outlet	Accepts standard garden hose or portable supply tank Water level regulated by float valve Low-water shutoff for pump longevity	Made from thick dense cross corrugated cellulose Treated with special resin for algae and bacteria free.	Easy accessible reservoir for convenient water treatment drain plug for easy water removal



**AVLANCHE 18**

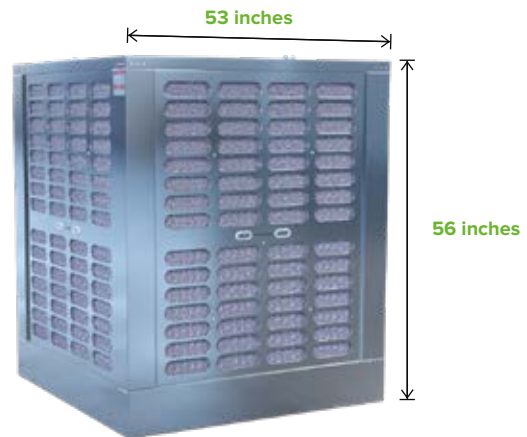

**AVLANCHE 30**

\*Under ideal test conditions. Actual performance may vary depending on the ambient conditions and the heat load. All specifications are approximate and may vary within + 10% of the specified value. All products are subject to continuous improvement. The company reserves the right to change specifications without any prior notice. Images shown above are not as per scale.

We Support



Plot No. 3, Industrial Phase III - Sirsa (Haryana) Customer Care: +91 7876454321